#122

Picture Taking with the

No. 3A Folding Pocket Kodak

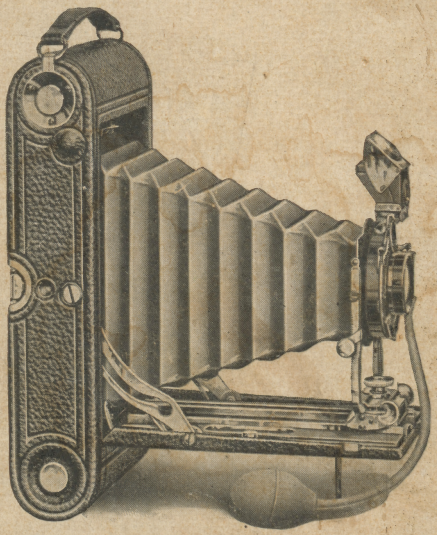

Published by
EASTMAN KODAK CO.
Rochester, N. Y.

KODAK

Trade Mark, 1888.

EASTMAN KODAK COMPANY,

ROCHESTER, N. Y.

MANUFACTURERS OF

Kodaks,
Brownie Cameras,
Kodak Film Tanks,
Kodak Dry Mounting Tissue,
Velox Paper,
Angelo Platinum Paper,
Eastman's Solio Paper,
Eastman's Sepia Paper,
Eastman's Ferro-Prussiate Paper,
Eastman's Velvet Bromide Paper,
Eastman's Royal Bromide Paper,
Eastman's Standard Bromide Paper,
Eastman's Enameled Bromide Paper,
Eastman's Matte-Enamel Bromide Paper,
Eastman's Platino Bromide Paper,
Eastman's W. D. Platinum Paper,
Eastman's N. C. Film,
Eastman's Dry Plates,
Tripods and
Other Specialties.

TRADE MARKS REG. U. S. PAT. OFF.

May, 1909.

PICTURE TAKING WITH THE

No. 3 A
FOLDING POCKET KODAK

PRICE, 10 CENTS.

PUBLISHED BY THE
EASTMAN KODAK COMPANY,
ROCHESTER, NEW YORK.

CONTENTS.

PART I.
Loading.
Section 1. Loading with Film.
Section 2. Loading with Plates.
PART II.
Making the Exposures.
Section 1. Operating the Shutter.
Section 2. Instantaneous Exposures.
Section 3. Time Exposures.
Section 4. Flashlight Exposures.
Section 5. The Rising and Sliding Front.
PART III.
Removing the Film.
PART IV.
Developing.
PART V.
Printing on Velox.
PART VI.
Mounting.

BEFORE LOADING.

Before taking any pictures with the 3A Folding Pocket Kodak read the following instructions carefully and make yourself perfectly familiar with the instrument, taking especial care to learn the construction of the shutter. Work it for both time and instantaneous exposures several times before threading up the film.

The first and most important thing for the amateur to bear in mind is that the light which serves to impress the photographic image upon the sensitive film in a small fraction of a second when it comes through the lens, can destroy the film as quickly as it makes the picture. After the film has been developed and all *developer thoroughly washed out*, it may be quickly transferred in subdued white light to the fixing bath without injury. Throughout all the operations of loading and unloading, be extremely careful to keep the black paper wound tightly around the film to prevent the admission of light.

EASTMAN KODAK COMPANY,

Rochester, N. Y.

PART I.

SECTION I.

LOADING WITH FILM.

THE FILM.

The film for the No. 3A Folding Pocket Kodak is furnished in light-proof cartridges and the instrument can, therefore, be loaded in daylight. The operation should, however, be performed in a subdued light, not in the glare of bright sunlight. It should also be borne in mind that after the seal is broken, care must be taken to keep the black paper taut on the spool, otherwise it may slip and loosen sufficiently to fog the film.

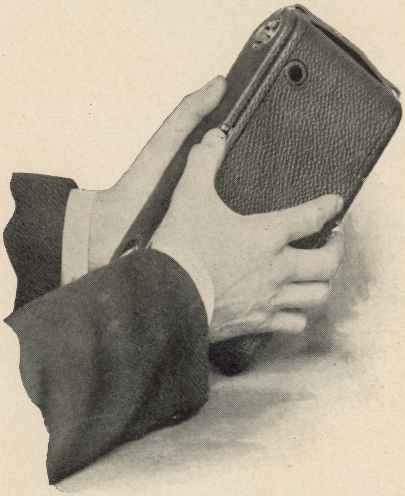

FIG. I.

Removing the Back.

I. To load the Kodak, take a position at a table where the daylight is somewhat subdued, and grasping the instrument with the left hand remove the back by pressing in simultaneously with the thumb and second finger of the right hand as indicated in Fig. I.

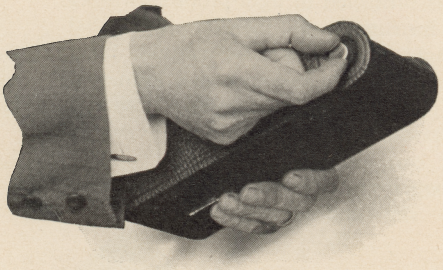

FIG. II.
Springing Out a Spool Pin.

II. The Kodak having been opened, an empty spool having a slit in it will be seen in the winding end of the camera. This forms the reel on which the film is wound after exposure. The full spool is to be placed in the recess at the opposite end of the Kodak. To accomplish this pull out spool pins as shown in Fig. II.

III. Drop the film cartridge into this recess, as shown in Fig. III., being careful to *get the top of the spool at the top of the camera.* The top is the winding side of the camera. Each cartridge is marked on the end.

Note: If the cartridge is inserted wrong end up, the black paper instead of the film will be brought next the lens, resulting, of course, in the absolute loss of the pictures.

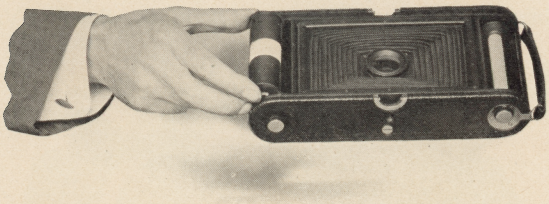

FIG. III.
Inserting the Cartridge.

IV. Push spool pins into place so that spool revolves upon them.

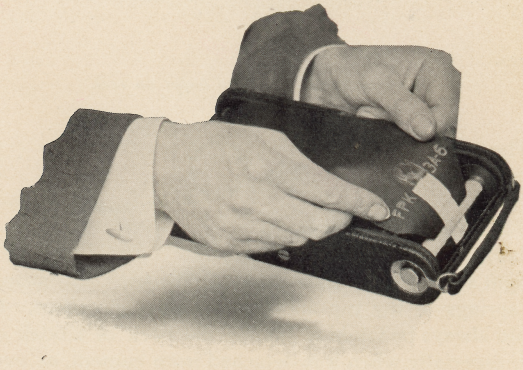

FIG. IV.
Threading up the Black Paper.

V. Remove the gummed slip that holds the end of the black paper; pass the paper over the two aluminum rollers and thread into the slit in reel, as shown in Fig. IV. Be careful in so doing that the paper draws straight and true.

VI. Give the key one or two slight turns—just enough to bind the paper on the reel—and no more. See Fig. V.

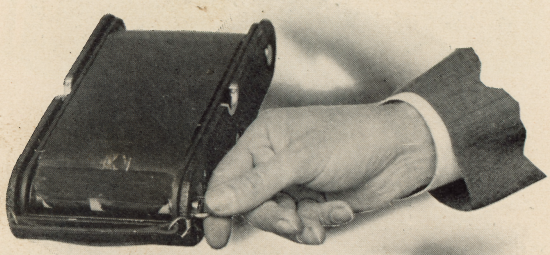

FIG. V.

Turning the Key to bind paper on reel.

The paper should now be in position indicated in Fig. VI.

FIG. VI.

Showing position of paper.

VII. Replace the back on Kodak, being careful to put it on right side up, (the wide catch at the top) and snapping the springs at the top and bottom fully into place. Care should always be taken to handle the back of Kodak carefully, especially when it is detached from camera, as even a slight bend would make it fit badly, resulting very probably in a leakage of light and consequent loss of film.

Throughout the foregoing operation, from the time the gummed slip is cut on the fresh roll of film until the back is once more in place, keep the black paper wound tightly on the roll. If it is allowed to loosen, light will be admitted and the film fogged.

FIG. VII.

VIII. The roll of film in the camera is covered with black paper and this must be reeled off before a picture can be taken. Turn the key slowly to the left and watch the little red celluloid window at the back of the camera. When 15 to 18 turns have been given, a hand pointing toward the first number will appear, then turn slowly until the figure 1 is in front of the red window. Fig. VII.

The film is now in position for taking the first picture.

SECTION 2.

LOADING WITH PLATES.

I. In using glass plates the plate holders must be loaded in a dark-room—that is, a room from which all white light has been excluded, as described on page 43. When using plates with the adapter, this camera makes pictures 3¼ x 5½ inches.

II. Provide also

No. 3A F. P. Kodak Combination Back.
No. 3A F. P. K. Plate Holders.
1 dozen Eastman's Extra Rapid Dry Plates, 3¼ x 5½.
Kodak Dark-room Lamp.
A shelf or table on which to work.

III. Light the lamp and place it upon the table.

IV. Remove the dark slides from the plate holders.

V. Open the box of plates by running a thin knife blade around the edge of the box.

VI. Take out one of the plates and place it in the holder, face up. (The face is the dull side.) Brush gently over the face of the plate with a camel's-hair brush to remove dust.

VII. Replace the dark slide in the holder.

VIII. Repeat the operation until all the plate holders have been filled, then close up the remaining plates in the box, wrap up securely and put them away in a dark drawer.

The remaining operation may be performed in daylight.

IX. Remove the back from the camera as before described. (See page 4.)

NOTE.—There must, of course, be no film in the Kodak when opening it for use with plates.

X. Snap the combination back into place, taking care that the springs at each side engage with the catches and that the back is right side up, i. e., the plate holder should draw from the end towards the Kodak handle. Remove the back of the adapter by pressing down on the inside spring catch and sliding same out. For focusing insert ground glass panel being sure that side marked faces the lens.

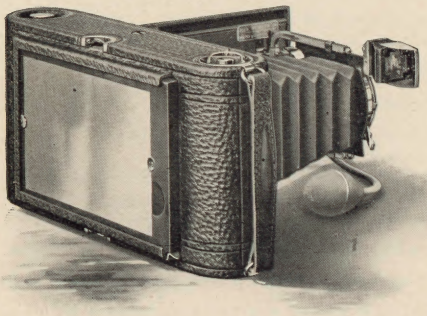

XI. After focusing close the shutter, remove the ground glass, pressing down on catch at the bottom to remove it, and insert one of the plate holders.

XII. Pull out the dark slide. The plate is now in position for making the first picture, and the exposure should be made the same as for films. After making the exposure re-insert the dark slide in plate holder. Remove the plate holder from the camera by means of leather lug, pressing back slightly on same to start it.

To prepare Focusing Scale so that it may be used (instead of the Ground Glass) with Plates, proceed as follows:

As the focal plane for film and the focal plane for plates are not the same when using the combination back, it will be necessary to mark the scale especially for use with the plates. To do this is a simple matter, but it should be done with care, as future results depend upon it. Measure off a distance of six feet from some plainly defined object, focus carefully, using the largest stop; note the position of the pointer over the focusing scale (it will be about ⅜ of an inch back of the corresponding mark for film); mark the scale for six feet by scoring a line on the scale with a fine pointed awl. Repeat the foregoing operation for eight, ten, twelve, fifteen, twenty-five and fifty feet, then focus on some object one hundred feet or more away. In the latter case the actual measurement is not necessary.

PART II.

MAKING THE EXPOSURES.

Before making an exposure with the No. 3A Folding Pocket Kodak, either time or instantaneous, be sure of four things:

FIRST—That the shutter is set properly.

SECOND—That the diaphragm stop is set at the proper opening.

THIRD—That the camera is focused.

FOURTH—That an unexposed section of the film is turned into position. (Or a fresh plate is in position.)

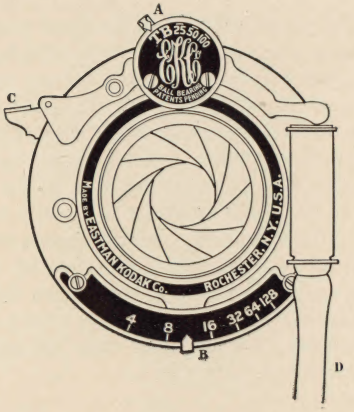

SECTION I.

OPERATING THE SHUTTER.

Perfect familiarity with the shutter is essential to successful picture taking with any camera. The following directions should, therefore, be carefully read and the shutter operated several times before threading the film up for use.

NOTE: To attach the tube D, simply moisten the end a trifle and it will be found to slip into place readily.

INSTANTANEOUS EXPOSURES.

FIRST—Set the lever A at 25, 50 or 100, according to the time of instantaneous exposure desired.

NOTE: In bright light set the lever at 100, the highest speed. In more subdued lights set at 50 or 25, but do not attempt to make any instantaneous exposures in very dull light.

SECOND—Set the lever B at No. 8. Lever B controls the iris diaphragm and No. 8 is the proper opening for ordinary instantaneous exposures.

NOTE. For instantaneous exposures when the sunlight is unusually strong and there are no heavy shadows, such as in views on the seashore or on the water, or in tropical or semi-tropical climates, use the diaphragm No. 16. With *light* clouds or *slightly* smoky atmosphere use No. 4 at 100 or No. 8 at 50 or 25. *With heavy clouds do not attempt instantaneous exposures.*

THIRD—Compress the rubber bulb on Tube D or press down the release C. *This makes the exposure.*

NOTE: Squeeze the bulb with a firm, quick movement.

TIME EXPOSURES.

FIRST—Set the lever A at the point T (time). This adjusts the shutter for time exposures.

SECOND—Set the lever B at No. 16, 32, 64 or 120. See instructions for use of stops, p. 26.

THIRD—Press the bulb. *This opens the shutter.* Time exposure by the watch. Again press the bulb. *This closes the shutter.* Shutter may be opened by touching release C and closed by a second pressure if desired.

BULB EXPOSURE.

When it is desirable to make a very short time exposure this is best accomplished by making a "bulb exposure."

FIRST—Set the lever A at the point "B" (bulb). This adjusts the shutter for bulb exposures.

SECOND—Set the lever B controlling the stops at No. 16, 32, 64 or 128 as desired. See page 26.

THIRD—Compress the bulb to open the shutter, and release it to close the shutter. *This makes the exposure.* The shutter will remain open as long as the bulb is under pressure.

NOTE. This method will not answer for a long time exposure for the reason that when the compressed air has leaked out, the shutter will close of itself.

Do not oil any part of the shutter.

In case of accident return shutter to your dealer or to us for repairs. As a general rule, make exposures with the bulb instead of with the release C, as the pneumatic release is less likely to jar the camera.

NOTE. The indicator on the face of the shutter registers each exposure as made.

SECTION 2.

INSTANTANEOUS EXPOSURES.

"SNAP SHOTS"

To take instantaneous pictures the object must be in the broad, open sunlight, but the camera should not. The sun should be behind the back or over the shoulder of the operator.

1.—FOCUS ON THE SUBJECT.

I. Press the concealed button as shown in (Fig. I.) and push down the bed of camera to the limit of motion.

II. Grasp the springs at bottom of front board, set the locking device for the distance

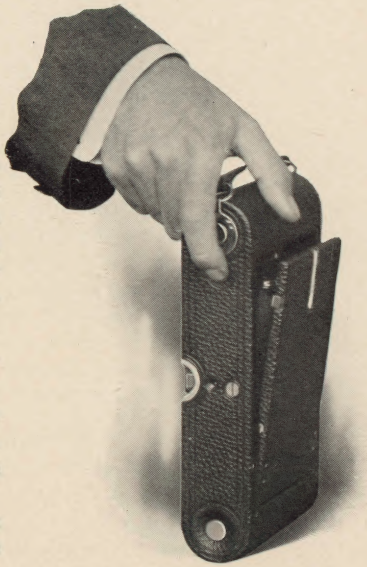

FIG. I.
Opening the Front.

desired; then pull out the front to the limit of motion. Fig. II.

NOTE.—The index plate is scaled both by feet and by metres and care should be taken not to confound them.

It is not necessary to estimate the distance with any more than approximate accuracy; for instance, if the focus is set at 25 feet (the usual distance for ordinary street work) the sharpest part of the picture will be the objects at that distance from the camera, but everything from 15 to 35 feet will be in good focus. For general street work the focus may be kept at 25 feet, but where the *principal object* is nearer or farther away, the focus should be moved accordingly. The index plate is divided for 6, 8, 10, 12, 15, 25, 50 and 100 feet. Everything beyond 100 feet is in the 100 foot focus. Nothing nearer than 6 feet can be focused without using a portrait attachment. See page 22.

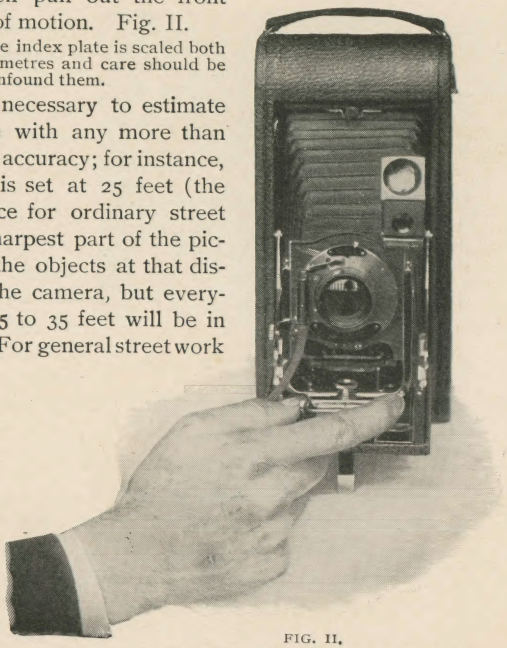

FIG. II.
Extending the Bellows and Focusing.

AUTOMATIC LOCKING DEVICE.

The automatic locking device which is on the left side of camera bed will be found a great convenience in focusing.

By means of this device the front locks automatically at 6, 8, 10, 12, 15, 25, 50 or 100 feet focus.

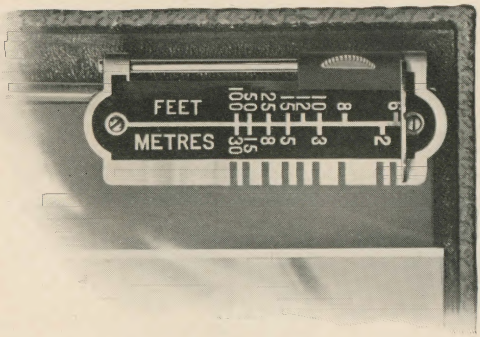

Showing Automatic Locking Device.

To set the focus, press down on lever A, shown in diagram, and set catch in the slot marked for the distance desired, 6, 10, 15, 25, 50 or 100 feet (the scale is also marked in metres). Then pull out front of camera to limit of motion and the camera will be in focus for the distance at which you have set the catch.

When not in use the lever of locking device should be shoved to the extreme front.

WITH PLATES.

When using plates with the combination back the ground glass *may* be employed for focusing if desired. The automatic locking device in this case cannot be used. Insert ground glass in plate adapter. Raise the focusing shade. Open the shutter. Focus carefully with the largest stop before the lens and when the lines show sharp and true close the shutter. Remove the ground glass and insert plate holder.

2.—USE STOP NO. 8.

For all ordinary out-door work when the sun is very bright use stop No. 8. If a smaller stop be used, the light will be so much reduced that it will not sufficiently impress the image on the film and failure will result.

In views on the water when the sunlight is *unusually strong* and there are no heavy shadows, or in tropical or semi-tropical climates, diaphragm No. 16 may be used.

If a smaller stop opening than No. 16 be used for snap shots *absolute failure will result.*

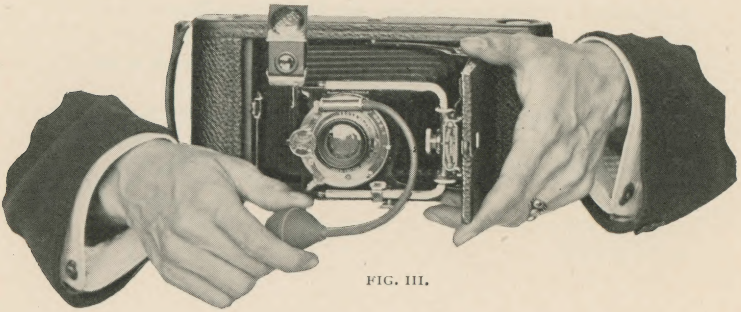

FIG. III.

3.—LOCATE THE IMAGE.

Aim the camera at the object to be photographed and locate the image in the finder. For a horizontal picture hold the camera as shown in Fig. III., reversing the finder

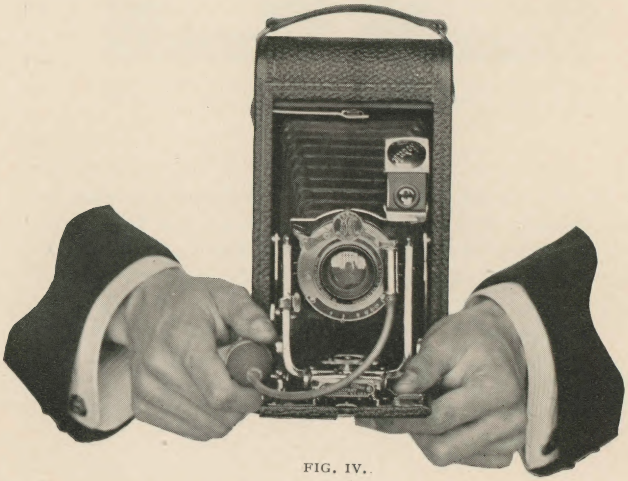

FIG. IV.

as indicated. Always look into the finder from directly over it, *not at an angle.* (Of course when the focusing glass is employed the image will be located on that instead of in the finder.)

For a vertical exposure the camera must be held as shown in Fig. IV. The finders give the scope of view and show a fac-simile of the picture as it will appear, but on a reduced scale.

Any object that does not show in the finder will not show in the picture.

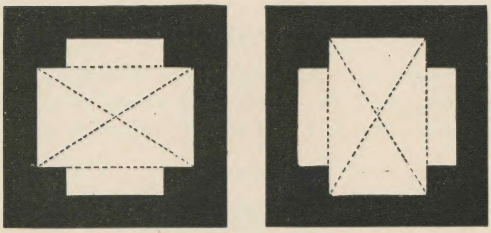

FIG. V.

It will be noticed that the top of the finder is notched as shown in Fig. V. This is done so that the one finder will correctly show the view included when the Kodak is held in either horizontal or vertical position. As the picture taken with the 3A Folding Pocket Kodak is oblong it will readily be seen that unless the finder was made in this manner it could not correctly show the exact view intended when held in either position.

Remember that only the view indicated in the dotted lines will show in the picture.

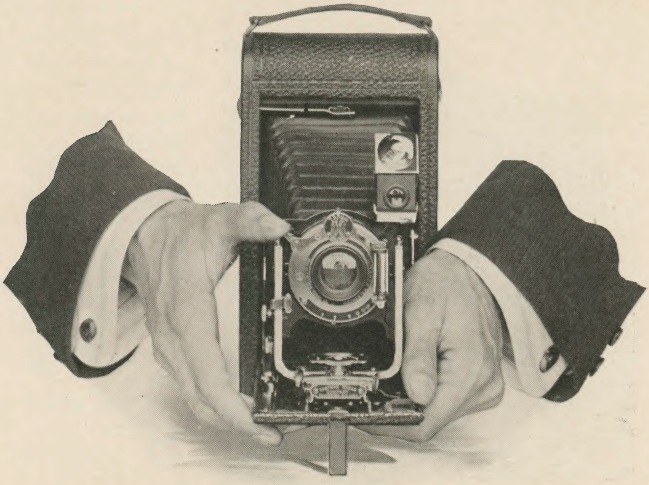

FIG. VI.

Fig. VI. shows how to hold the camera when making an exposure without the use of the bulb. Grasp the bed of Kodak firmly with the left hand, steady it with the right and with the thumb of the right hand lightly touch the exposure lever.

4.—HOLD IT LEVEL.

The Kodak must be held level.

If the operator attempts to photograph a tall building while standing near it, by pointing the camera upward (thinking thereby to center it) the result will be similar to Fig. VII.

This was pointed too high. This building should have been taken from the middle story window of the building opposite.

FIG. VII.

The operator should hold the camera *level*, after withdrawing to a proper distance, as indicated by the image shown in the finder on the top of the camera.

NOTE: The rising front may be used in helping to center high objects on the plate. See page 30.

If the object be down low, like a small child or a dog, the Kodak should be held down level with the center of the object.

5.—COMPRESS THE BULB.

HOLD THE CAMERA STEADY,
HOLD IT LEVEL AND
COMPRESS THE BULB.

This makes the Exposure.

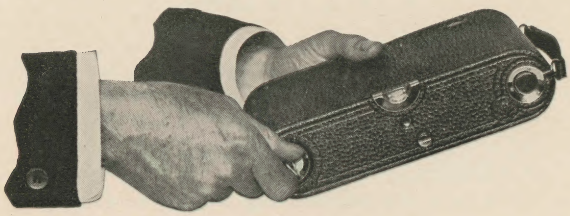

FIG. VIII.

TURN A NEW SECTION OF FILM INTO POSITION: Turn the key in top of camera slowly to the left, until the next number appears before the red window. Three or four turns will be sufficient to accomplish this. The warning hand appears only before No. 1. See Fig. VIII.

Repeat the foregoing operations for each picture.

SECTION 3.

TIME EXPOSURES.

INTERIORS

1. Put the Kodak in position.



Diagram showing position of Kodak.

Set camera in such a position that the finder will embrace the view desired.

The diagram shows the proper position for the Kodak. It should not be pointed directly at a window, as the glare of light will blur the picture. If all the windows cannot be avoided, pull down the shades of such as come within the range of the Kodak.

To make a time exposure, place the Kodak on some firm support like a table or tripod, and focus as before described.

Fig. I. (page 20) shows the Kodak in position for a vertical exposure. The Kodak is also provided with tripod sockets and may be used on a tripod.

When it is desired to make a horizontal time exposure without the use of a tripod, pull out the slide in bed of Kodak as shown in Fig. II, page 20.

Adjust the shutter for a time exposure as described on page 11.

All being in readiness, compress the bulb or touch the lever once to open and again to close the shutter. Time the exposure by the watch.

TURN THE KEY.

Turn a new film into position as described before (see page 21).

THE KODAK IS NOW READY FOR THE NEXT INTERIOR EXPOSURE.

Follow the directions given heretofore for each successive exposure.

When the last Interior Exposure is made, adjust the shutter for instantaneous exposures as before directed.

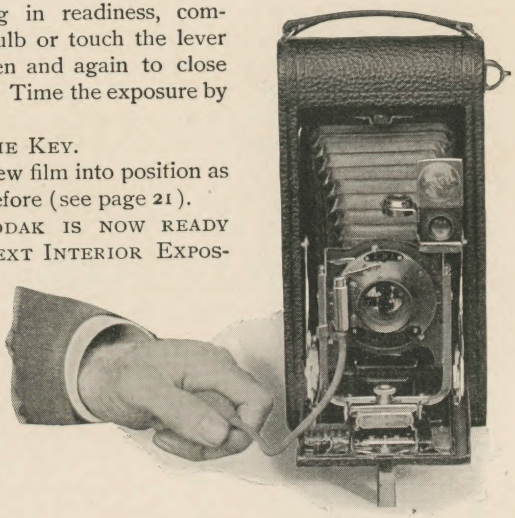

FIG. I.

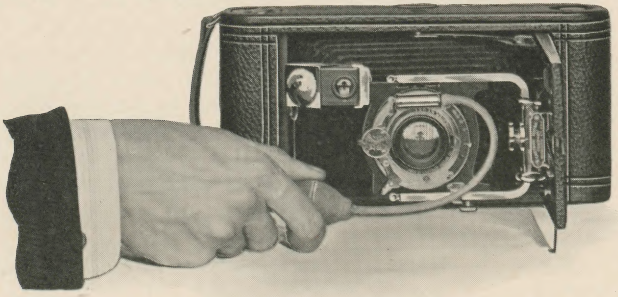

FIG. II.

TIME NEEDED FOR INTERIOR EXPOSURES.

The following table gives the time of the exposure required under varying conditions of light with the stop No. 16 in the lens. If the stop No. 8 is used give only one-half the time, if the stop No. 128 is used give 8 times the time of the table. The smaller the stop the sharper the picture. The No. 16 gives the best results for interiors.

White walls and more than one window :

bright sun outside, 4 seconds ;
hazy sun, 10 seconds ;
cloudy bright, 20 seconds ;
cloudy dull, 40 seconds.

White walls and only one window :

bright sun outside, 6 seconds ;
hazy sun, 15 seconds ;
cloudy bright, 30 seconds ;
cloudy dull, 60 seconds.

Medium colored walls and hangings and more than one window :

bright sun outside, 8 seconds ;
hazy sun, 20 seconds ;
cloudy bright, 40 seconds ;
cloudy dull, 80 seconds.

Medium colored walls and hangings and only one window :

bright sun outside, 12 seconds ;
hazy sun, 30 seconds ;
cloudy bright, 60 seconds ;
cloudy dull, 120 seconds.

Dark colored walls and hangings and more than one window :

bright sun outside, 20 seconds ;
hazy sun, 40 seconds ;
cloudy bright, 80 seconds ;
cloudy dull, 2 minutes, 40 seconds.

Dark colored walls and hangings and only one window :

bright sun outside, 40 seconds ;
hazy sun, 80 seconds ;
cloudy bright, 2 minutes, 40 seconds ;
cloudy dull, 5 minutes, 20 seconds.

The foregoing is calculated for rooms whose windows get the direct light from the sky and for hours from three hours after sunrise until three hours before sunset.

If earlier or later the time required will be longer.

TO MAKE A PORTRAIT.

Place the sitter in a chair partly facing the light, and turn the face slightly toward the camera (which should be at the height of an ordinary table.) Center the image in the finder. For a three-quarter figure the Kodak should be from 6 to 8 feet from the figure; and for a full figure, 8 to 10 feet. The background should form a contrast with the sitter.

KODAK PORTRAIT ATTACHMENT.

The attachment is simply an extra lens slipped on over the regular lens and in no way affects the operation of the lens except to change the focus.

By means of the Portrait Attachment, large head and shoulders portraits of various sizes may be obtained. With the Attachment in position and the focus set at 6 feet the subject should be placed exactly 2 feet, 8 inches from the lens.

At 8 feet focus, place the subject 3 feet from the lens.

At 15 feet focus, place the subject 3½ feet from the lens.

At 25 feet focus, place the subject 4 feet from lens.

At 100 feet focus, place subject 4½ feet from lens.

TIME EXPOSURES IN THE OPEN AIR.

When the stop No. 128 is in the lens the light admitted is so much reduced that time exposures out of doors may be made the same as interiors, but the exposure must be much shorter.

WITH SUNSHINE—$\frac{1}{5}$ second.

WITH LIGHT CLOUDS—From ½ to 1 second will be sufficient.

WITH HEAVY CLOUDS—From 2 to 5 seconds will be required.

The above is calculated for the same hours as mentioned above and for objects in the open air. For other hours or for objects in the shadow, under porches or under trees, no accurate directions can be given; experience only can teach the proper exposure to give.

Time exposures cannot be made while the Kodak is held in the hand. Always place it upon some firm support, such as a tripod, chair or table.

For exceedingly short time exposures as above described use the "bulb exposure." See page 11.

"F." AND "U. S." SYSTEMS.

A lens is said to work at a certain "speed," this means that the lens will cut the plate sharp to the corners, with an opening a certain proportion of its focal length. It should be borne clearly in mind that this speed depends *not* upon the size of the opening but upon the size of the opening *in proportion to the focal length of the lens* (distance from lens to plate when focused on infinity). The lens that will cut sharp with the largest opening is said to possess the greatest speed.

Such openings are termed stop or diaphragm openings, and for convenience in estimating and time exposures, are arranged according to two systems, the f. system and the Uniform system, or U. S. System, as commonly abbreviated.

In the f. system, the proportional size or "value" of the stop opening is designated by "f," and is the quotient obtained by dividing the focal length of the lens by the diameter of the stop.

Taking, for instance, a lens of 8-inch focus with a stop 1 inch in diameter and we find that $8 \div 1 = 8$; hence, 8 is the f. value of the stop and would be designated f. 8. Suppose the stop is $\frac{1}{4}$ inch in diameter, we would then have $8 \div \frac{1}{4} =$ f. 32.

For convenience, the Uniform system of marking stop openings has been adopted by nearly all manufacturers of iris diaphragms. Such convenience is at once apparent when we understand that each higher number stands for an opening having *half* the *area* of the preceeding opening, each smaller stop (or higher number) requiring double the time of the one next larger.

With the f. system, each stop is a certain proportion of the focal length and not arranged with reference to the other

openings, so that estimating exposure is much more complicated by this system.

As a number of exposure meters and similar devices for determining the proper exposure are based upon the f. system, we append the following table showing the "f. Value" for each of the Uniform system openings :

U. S. 4=f. 8	U. S. 32=f. 22.6
U. S. 8=f. 11.3	U. S. 64=f. 32
U. S. 16=f. 16	U. S. 128=f. 45.2

DIAPHRAGMS.

The stops should be used as follows :

No. 4—For instantaneous exposures on *slightly* cloudy days.

No. 8—For *all ordinary instantaneous exposures* when the sun shines.

No. 16—For instantaneous exposures when the sunlight is unusually strong and there are no heavy shadows ; such as in views on the seashore or on the water, or in tropical or semi-tropical climates ; also for interior time exposures, the time for which is given in the table on page **21**.

Nos. 32 and 64—For interiors. *Never for instantaneous exposures.*

No. 128—For time exposures outdoors in cloudy weather. *Never for instantaneous exposures.* The time required for time exposures on cloudy days with smallest stop will range from 1-5 second to 5 seconds, according to the light. The smaller the stop the sharper the picture.

Absolute failure will be the result if you use the smallest stop for instantaneous exposures.

SECTION 4.

FLASH LIGHT PICTURES.

By the introduction of Eastman's Flash Sheets, picture taking at night has been wonderfully simplified. A package of flash sheets, a piece of cardboard, a pin and a match complete the list of essential extras.

The cost then is :

One Package Eastman's Flash Sheets, No. 1, 25c.

With flash sheets, no lamp is necessary, there is a minimum of smoke and they are far safer than any of the self-burning flash powders, besides giving a softer light that is less trying to the eyes.

Many interiors can be taken with the flash sheets that are impracticable by daylight, either by reason of a lack of illumination or because there are windows in a direct line of view which cannot be darkened sufficiently to prevent the blurring of the picture.

Evening parties, groups around a dinner or card table or single portraits may be readily made by the use of our flash sheets, thus enabling the amateur to obtain souvenirs of many occasions which, but for the flashlight, would be quite beyond the range of the art.

PREPARATION FOR THE FLASH.—The camera should be prepared for time exposure, as directed on page 21 of this manual (except that the No. 8 stop must be used), and placed on some level support where it will take in the view desired.

Pin a flash sheet by one corner to a piece of cardboard which has previously been fixed in a perpendicular position. If the cardboard is white it will act as a reflector and increase the strength of the flash.

The flash sheet should *always* be placed two feet behind and two or three feet to one side of the camera. If placed in front, or on a line with front of Kodak, the flash would strike the lens and blur the picture. It should be placed at one side as well as behind, so as to throw a shadow and give a little relief in the lighting. The flash should be at the same height or a little higher than the camera. The support upon which the flash is to be made should not project far enough in front of it to cast a shadow in front of the Kodak. An extra piece of cardboard a foot square placed under the flash sheet will prevent any sparks from the flash doing damage.

TAKING THE PICTURE.

Having the Kodak and the flash sheets both in position and all being in readiness, open the camera shutter, stand at arm's length and touch a match to the lower corner of the

flash sheet. There will be a bright flash which will impress the picture on the sensitive film. Then push the lever to close the shutter and turn a fresh film into place with the key, ready for another picture.

THE FLASH SHEETS.

The number of sheets required to light a room varies with the distance of the object farthest from the camera, and the color of the walls and hangings.

When two or more sheets are to be used they should be pinned to the cardboard, one above the other, the corners slightly over-lapping.

TABLE.

For	10	feet	distance	and	light	walls	and hangings	use 1 sheet.
"	10	"	"	"	dark	"	"	"	2 sheets.
"	15	"	"	"	light	"	"	"	2 "
"	15	"	"	"	dark	"	"	"	3 "
"	25	"	"	"	light	"	"	"	3 "
"	25	"	"	"	dark	"	"	"	4 "

To Make a Portrait.—Place the sitter in a chair partly facing the Kodak (which should be at the height of an ordinary table) and turn the face slightly towards the Kodak. The proper distance from the camera to the subject can be ascertained by looking at the image in the finder. For a three-quarter picture this will be 8 feet, and for a full figure 10 feet.

The flash should be on the side of the Kodak away from the face, that is, the sitter should not face it. The flash should not be higher than the head of the sitter.

To Make a Group.—Arrange the chairs in the form of an arc, facing the Kodak, so that each chair will be exactly the same distance from the camera. Half the persons composing the group should be seated and the rest should stand behind the chairs. If the group is large any number of chairs may be used, but none of the subjects should be seated on the floor, as sometimes seen in large pictures, because the perspective would be too violent.

BACKGROUNDS.—In making single portraits or groups, care should be taken to have a suitable background against which the figures will show in relief; a light background is better than a dark one, and often a single figure or two will show up well against a lace curtain. For larger groups a medium light wall will be suitable.

The *finder* on the camera will aid the operator in composing the groups so as to get the best effect. In order to make the image visible in the finder the room will have to be well lighted with ordinary lamplight, which may be left on while the picture is being made, provided none of the lights are placed so that they show in the finder.

Eastman's Flash Sheets burn more slowly than flash powders, producing a much softer light and are, therefore, far preferable in portrait work; the subject, however, should be warned not to move, as the picture is not taken *instantaneously*, about one second being required to burn one sheet.

EASTMAN'S FLASH CARTRIDGES AND FLASH POWDER.

Eastman's Flash Cartridges or Flash Powder may be substituted for the sheets if desired. We recommend the sheets, however, as more convenient, safer, cheaper and capable of producing the best results. The powder or cartridges are only superior where absolutely *instantaneous* work is essential.

SECTION 5.

RISING AND SLIDING FRONT

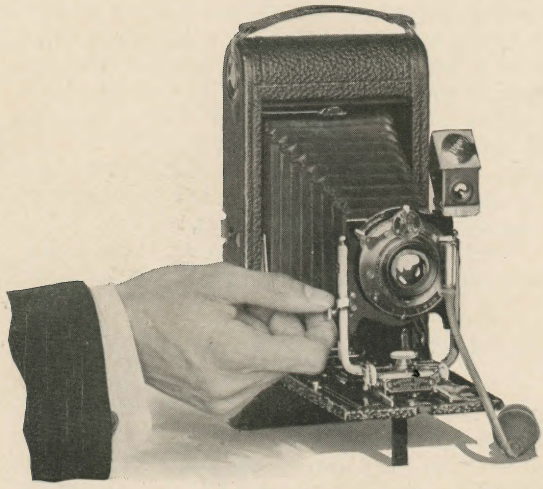

FIG. I.

The No. 3A Folding Pocket Kodaks are provided with a rising front, which may be utilized in cutting out an undesirable foreground or to assist in taking in the top of a high building, etc. The front will also slide to either the right or left (up and down when used for horizontal pictures).

Fig. I. shows how to raise or lower the front when making vertical exposures. Pull out the small milled head on the right hand side of the front, and raise or lower the

front by turning the milled head. When the front is at the desired height let the milled head spring back into its original position. This will lock the front in place. When through using pull out the milled head and center lens by moving the front up or down, as the case may be, until the small spring on the back of front board, just above the pinion, rests in the notch in the side of the rack.

The front can be moved to the right or left (up and down when Kodak is placed on its side for horizontal exposure) by loosening thumb screw directly under the shutter as

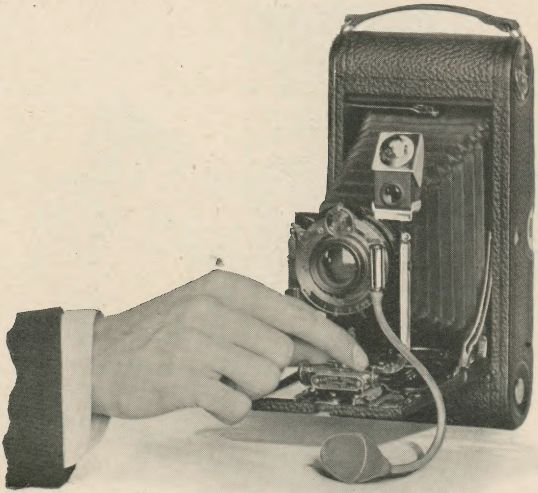

FIG. II.

shown in Fig. II., and sliding front in either direction to the desired position. Lock in position by tightening thumb screw. When through using reverse the operation shown in Fig. II., and slide back to the center and lock in position.

In order to make a sharp picture when using the rising front it will be better to use a small stop (No. 32 or 64) and

as this in turn necessitates a time exposure, a tripod or other firm support must be provided. Experience alone can teach the many ways in which the rising and sliding front may be used for composing artistic pictures.

N. B.—Do not fail to center front before closing camera, as otherwise there is danger of ruining bellows when folding.

CLOSING THE KODAK.

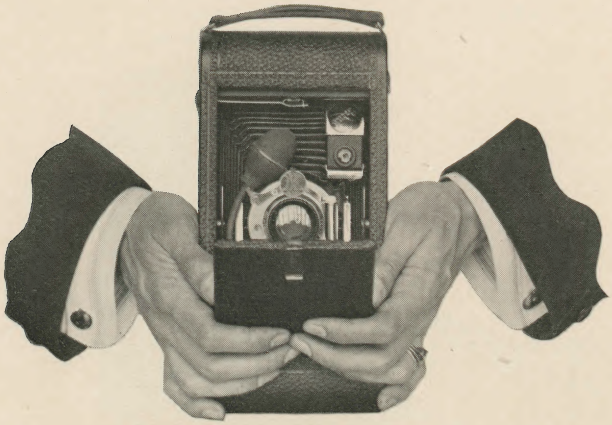

When through using the Kodak fold the bellows by reversing the operation shown in Fig. II., page 13, and press down on arm locks on each side of bed, as shown above. The bed will now close readily.

CAUTION.

Before closing the bed of the camera be careful to note that the finder is in the upright position with hood down and that the front board has been pushed back to the limit of motion.

If it is in proper position it will not interfere with the bed in closing.

PART III.

REMOVING THE FILM.

No dark-room is required for changing the spools in the Folding Pocket Kodak. The operation should, however, be performed in a subdued light.

I. When the last section of film has been exposed, turn the key about 5 half turns.

II. Provide an extra spool of film to fit this camera, and take a position by a table as far as possible from any window.

III. Remove the back from the Kodak as before described, page 3.

IV. Holding the paper taut, so as to wind tightly, turn the key until the paper is all on the reel. Fig. I.

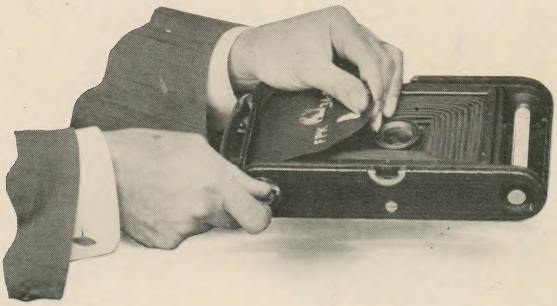

FIG. I.

V. Hold the reel tightly with one hand to prevent the paper from loosening, and fasten down black paper by means of gummed sticker that will be found at end of roll.

VI. Pull out spool pins at the bottom of recess which contains the full spool in the same manner as described for opposite end of camera. See Fig. II., page 4.

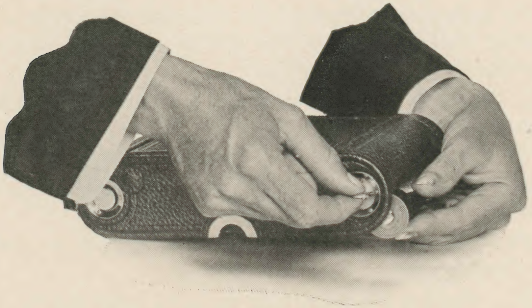

FIG. II.
Removing the Cartridge of Exposed Film.

VII. Pull out the key as shown in Fig. II. until it disengages from the slot in spool. The spool will then drop out readily.

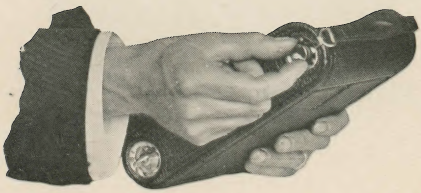

FIG. III.
Pulling Out Center Pins to Remove Empty Spool.

VIII. Wrap up the spool of exposed film to prevent injury from exposure to strong light.

IX. Now take out the empty spool by drawing out the center pins which hold it in place.

X. Slip this spool into place at the winding side of camera (this will

form the new reel) pulling out the key in so doing as shown in Fig. IV. and fitting the web which is attached to key into the slot in the end of spool. Now push the axis pin in the opposite end of spool until it is fixed in position by the embossed stop.

XI. Load as described in Part I., page 3.

The roll of exposures can now be mailed to us for finishing (see price list) or you can do the developing and printing yourself.

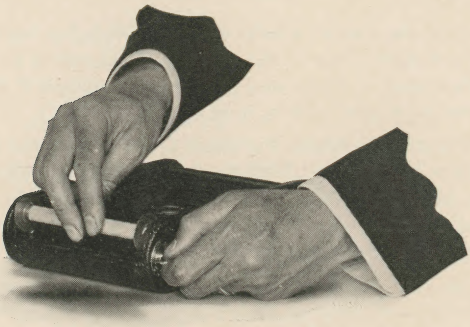

FIG. IV.
Pulling Out Key to Admit New Reel.

NOTE: In mailing us films for development do not fail to mark the packages plainly with your name and address and write us a letter of advice, with remittance.

"CINCH MARKS."

If the film and paper loosen up a trifle when taken from the camera, many amateurs are likely to take the cartridge in the hand and wind it as closely as possible, cinching it tightly with a twisting motion. There's nothing more likely

to injure the negative than this tight drawing of the film as it abrades the surface, making fine parallel scratches running lengthwise of the film, which in some cases, will ruin the negative. *Do not "cinch" the cartridge.* It simply needs to be wound tightly enough so that the black paper keeps inside the flanges.

DIMMED FINDERS AND HOW TO MAKE THEM BRIGHT AGAIN.

For some cause which is not thoroughly understood, glass will sometimes "sweat" to such an extent as to cover it with a sort of film, which, of course, makes it very dull whether it be used as lens or mirror.

Whatever the cause, the result is the occasional dimming of finders and lenses. With finders the trouble is sometimes in the mirror, which necessitates opening the finder and wiping the mirror by means of a soft cotton cloth.

The brilliant finders on the No. 3 A Folding Pocket Kodaks can readily be cleaned by pressing on the sides of the finder just back of the circular grooves and swinging forward the top. After cleaning as above close by simply snapping back into position.

CLEAN LENSES.

Dirty or dusty lenses are frequently the cause for photographic failures. These pictures illustrate this point clearly. The sharp, full-timed picture at top was taken with the lens clean and in good order. To produce the effect shown in the picture at bottom, the operator lightly touched the face of the lens with his thumb, which was slightly damp with perspiration.

Lenses should be frequently examined by looking *through* them, and if found to be dirty, should be wiped, both front and back, with a clean, soft linen handkerchief. It is well also to occasionally wipe out the inside of camera with a slightly damp cloth. In summer weather this needs special attention. Large spots of dust or dirt on the lens will cause defects in the picture, while if the lens is evenly covered with a film of dust, dirt or moisture, the effect will be to cut off a great deal of light and make the picture undertimed.

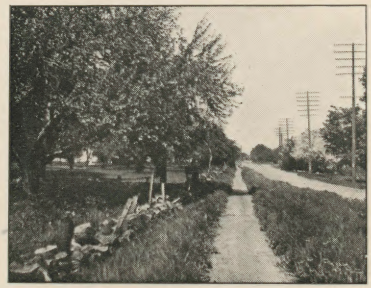

Clean Lens

Lens Slightly Dirty.

PART IV.

DEVELOPING.

There is no necessity of working in a dark-room or waiting until night to develop film. It can be done in daylight at any time and place. And the daylight method of developing film gives better results than the dark-room way.

Film may be developed in daylight by the Kodak Film Tank method. Detailed directions for developing will be found in the manual which accompanies the goods. The operation is given briefly in the following pages.

We recommend the Kodak Film Tank method particularly for its simpleness, and the uniformly good negatives which it gives.

DEVELOPING WITH THE KODAK FILM TANK.

For use with No. 3A Folding Pocket Kodak provide a 3½ inch Kodak Film Tank.

The Kodak Film Tank consists of a wooden box, a light-proof apron, a "transferring reel," a metal "solution cup" in which the film is developed, and a hooked rod for removing film from solution. There is also a dummy film cartridge with which one should experiment before using an exposed cartridge. The various parts of the outfit come packed in the box itself.

1. Take everything out of the box. Take apron and Transferring Reel out of solution cup.

2. Insert the axle marked C and D in the cut, in the holes in front of box. The front will be toward you when the spool carrier in end of box is at your right.

3. The axle "C" must be pushed through the hollow spindle which will be found loose in the box. The two lugs on this spindle are to engage the hooks at end of apron. The axle "D" must be pushed through the hollow rod of the Transferring Reel to hold reel in position as indicated in the illustration. The flanges at each end of the Transferring Reel are marked "Y" in the illustration.

4. Attach one end of the apron to spindle through which axle "C" passes by means of the metal hooks which are to be engaged with the lugs on the spindle. (Fig. 2.) The corrugated side of the rubber bands is to be beneath the apron when it is attached. Turn to left on axle "C" and wind entire apron on to spindle, maintaining a slight tension on apron in so doing by resting one hand on it.

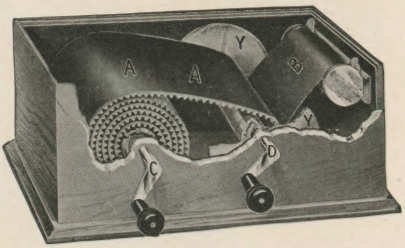

FIG. 1.

5. Insert film cartridge in spool carrier and close up the movable arm tight against end of spool. Have the black paper ("B" in Fig. 1) lead from the top.

IMPORTANT.

Film to be used in the Kodak Film Tank must be fastened to the black paper at both ends. All films are fastened at one end at our factory. For instructions on how to fasten the other end, see Film Tank Manual.

6. Break the sticker that holds down the end of black paper, thread the paper underneath the wire guard on transferring reel through which axle "D" passes and turn axle slowly to right until the word "stop" appears on black paper.

7. Now hook apron to lugs on axle "D" in precisely the same manner that you hooked the opposite end to axle "C" except that axle "D" turns to the right.

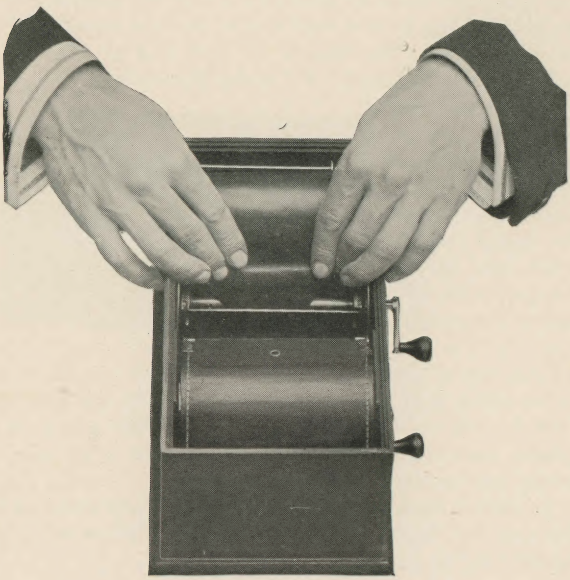

FIG. II.

8. Turn handle half a revolution so that apron becomes firmly attached and put on cover of box. Turn axle "D" slowly and steadily until black paper, film and apron are rolled up together on transferring reel. As soon as this is completed the handle will turn very freely.

9. Prepare developing solution in solution cup according to directions in Kodak Film Tank Manual.

10. Remove cover from box and draw out axle "D," holding apron and black paper with other hand to keep end of apron from loosening.

11. Remove entire Transferring Reel (now containing apron, black paper and film) which is freed by pulling out axle "D," and insert immediately in the previously prepared developer.

In removing reel do not squeeze the apron but hold it loosely or slip a rubber band about it to keep from unrolling.

USING THE SOLUTION CUP.

12. Having filled Solution Cup, lower Transferring Reel into cup with end containing cross bar up. (Fig. 3.) Let reel slide down slowly. The operation of removing reel from box can be done in the light of an ordinary room, but for safety it is well that the light should not be too bright. The total length of time for development is 20 minutes. Allow development to proceed for about two minutes with cover of solution cup off; then place the cover on the cup (Fig. 4) putting lugs on cover into grooves and tighten cover down by turning it to right.

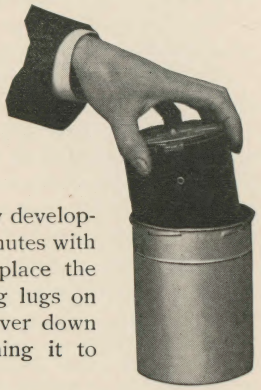

FIG. III.

Now turn the entire cup end for end and place in a tray or saucer to catch any slight leak from the cup. After seven minutes reverse it so cover will be up. At fifteen minutes, again invert the cup. Turning the solution cup allows the developer to act evenly and adds brilliancy and snap to the negatives.



FIG. IV.

13. The wire hook is to be used for lifting the reel out of the cup. Hook to the cross bar in one end of reel. When the end of reel containing cross bar is at the bottom of cup, the hook is just long enough to catch the cross bar.

14. When developing is completed pour out developer and fill cup with clear, cold water, and pour off three times to wash the film. Then remove Transferring Reel, separate film from black paper and place immediately in the Fixing Bath which should be in readiness, prepared in accordance with directions on page 45.

The film may be separated from black paper in light of an ordinary room if the developer is thoroughly washed out.

The operation of separating film and black paper should be done over a bowl or bath tub or sink.

If the Tank Developer is not to be used again immediately the apron and tank should be washed and wiped dry. The apron must always be perfectly dry when film is rolled up in same. The apron will dry almost instantly if immersed for a moment in very hot water.

Keep apron wound on Transferring Reel when not in use. Never leave apron soaking in water.

Note.—Immediately after lowering reel into solution cup catch it with the wire hook and move gently up and down two or three times, but not allowing reel to come above surface of developing solution. This is to expel air bubbles.

TIME AND TEMPERATURE FOR TANK DEVELOPMENT.

It sometimes happens that the amateur is not able to obtain or maintain the standard or normal temperature of 65 degrees Fahr. when using the Kodak Tank and the Kodak Tank Developer Powders. In such cases the following table will be found of value :

Temperature	Time One Powder	Time Two Powders
70 Degrees	15 Minutes	8 Minutes
69 "	16 "	
68 "	17 "	9 "
67 "	18 "	
66 "	19 "	
65 " NORMAL	**20 " NORMAL**	**10 " NORMAL**
64 "	21 "	
63 "	22 "	
62 "	23 "	11 "
61 "	24 "	
60 "	25 "	
59 "	26 "	12 "
58 "	27 "	
57 "	28 "	
56 "	29 "	13 "
55 "	30 "	
54 "	31 "	
53 "	32 "	14 "
52 "	33 "	
51 "	34 "	
50 "	35 "	15 "
49 "	36 "	
48 "	37 "	
47 "	38 "	16 "
46 "	39 "	
45 "	40 "	17 "

Temperature of Developer must not exceed 70 degrees Fahr., as above that point there is danger of the film frilling. 45 degrees Fahr. is the lowest temperature at which the developing powders can be dissolved and even at this temperature the powder must be finely crushed and added slowly to the water.

It is best to use the normal temperature (65 degrees) when possible as the use of a developer that is colder than normal has a slight tendency to increase the contrast in a negative while the use of a developer warmer than normal slightly flattens the resulting negatives.

DEVELOPING SEVERAL ROLLS OF FILM AT ONCE.

Several rolls of film may be developed at the same time if the operator wishes. To do this it is necessary to have a "Duplicating Outfit" consisting of 1 Solution Cup, 1 Transferring Reel and 1 Apron for each additional roll of film to be developed. The extra rolls of film may then be wound on to Transferring Reels as previously described and immersed in the Solution Cups.

Load your Kodak with Kodak Film.

Look for this Trade Mark on the Box.

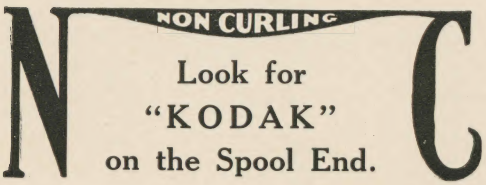

DEVELOPING IN DARK-ROOM.

Provide the following articles :

1 Kodak Dark-Room Lamp.
4 Developing Trays.
1 4 Ounce Graduate.
1 Stirring Rod.
1 Pkg. Eastman's Special Developer Powders.
1 Pound Kodak Acid Fixing Powder.

Also provide a pair of shears, a pitcher of cold water (preferably ice water) a pail for slops, and a *dark-room* having a shelf or table.

By a dark-room is meant one that is wholly dark—not a ray of light in it. Such a room can easily be secured at night almost anywhere. The reason a dark-room is required is that the film is extremely sensitive to white light, either daylight or lamplight, *and would be spoiled if exposed to it*, even for a fraction of a second.

Having provided such a room or closet, where, when the door is closed, no ray of light can be seen :

Set up on the table or shelf the Kodak Dark-Room Lamp, and light it as directed in the circular which comes in the box in which the lamp is enclosed.

The lamp gives a subdued red light which will not injure the film unless it is held too close to it. Set the lamp on the table at least eighteen inches from and with the *side* toward the operator. Never use a yellow light with N. C. film or fog will be the result.

1. Fill one of the trays nearly full of water (first tray).

2. Open one of the developer powders, then put the contents (two chemicals) into graduate and fill it up to the 4 ounce mark with water. Stir until dissolved with the wooden stirring rod and pour into second tray.

3. To develop film unroll the film and detach the entire strip from the black paper.

4. Pass the film through the tray of clean, cold water as shown in the cut, holding one end in each hand. Pass

through the water several times, that there may be no bubbles remaining on the film. When it is thoroughly wet, with no air bubbles, it is ready for development.

5. Now pass the film through the developer in the same manner as described for wetting it and shown in cut. Keep it constantly in motion, and in about one minute the high lights will begin to darken and you will readily be able to distinguish the unexposed sections between the negatives, and in about two minutes will be able to distinguish objects in the picture. Complete development in the strip, giving sufficient length of development to bring out what detail you can in the thinnest negatives. There is no harm in having your negatives of different density. This can be set right in the printing. The difference in density does not affect the difference in contrast.

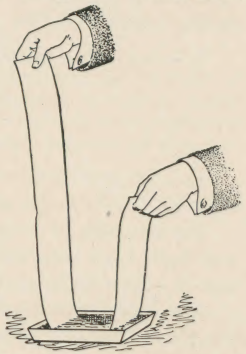

Keep the strip which is being developed constantly in motion, allowing the developer to act 5 to 10 minutes. The progress of development may be watched by holding the negatives up to the lamp from time to time.

When developing Eastman's N. C. Film, use a red lamp and take care not to hold the film close to the lamp for any length of time. This film is very rapid and is orthochromatic, therefore liable to fog unless handled very carefully.

6. After completing development cut the negatives apart with a pair of shears, transfer to the third tray and rinse two or three times with clear, cold water, and transfer to fixing bath (see page 45).

FIXING.

Provide a box of Kodak Acid Fixing Powder and prepare a fixing bath as follows: Remove the cover from the box and pour into the cover enough of the Fixing Powder to fill the cover level full. Put this into a tray (fourth tray of an Eastman developing outfit) or wash bowl and add eight ounces of cold water. When the powder has thoroughly dissolved add to the solution as much of the Acidifier, which you will find in a small box inside the large one, as will fill the cover of the small box level full. As soon as this has dissolved the Fixing Bath is ready for use. Any quantity of the bath may be prepared in the above proportions.

Pass the film face down (the face is the dull side) through the fixing solution, holding one end in each hand. Do this three or four times and then place one end of the film in the tray still face down and lower the strip into the solution in folds. (If the negatives have been cut apart immerse them singly.) Gently press the film where the folds occur, not tightly enough to crack it, down into the solution a few times during the course of fixing. This insures the fixing solution reaching every part of the film. Allow the film to remain in the solution two or three minutes after it has cleared or the milky appearance has disappeared. Then remove for washing.

N. C. Film must always be fixed in an acid bath. There is nothing superior to the Kodak Acid Fixing Bath, but the following formula may be used if desired:

Water,	16 ounces.
Hypo Sulphite of Soda,	4 ounces.
Sulphite of Soda (anhydrous),	80 grains.

When fully dissolved add the following hardener:

Powdered Alum,	½ ounce.
Citric Acid,	⅛ ounce.

This bath may be made up at any time in advance and may be used so long as it retains its strength, or is not sufficiently discolored by developer carried into it, as to stain the negatives.

NOTE—If you are using an Eastman developing outfit the fixing solution must only be used in tray No. 4, and the negatives, after fixing, must not be put in either No. 1 or No. 2 trays. Neither must any of the fixing solution be allowed to touch the films, through the agency of the fingers or otherwise, until they are ready to go into the fixing bath, otherwise they will be spotted or blackened so as to be useless.

WASHING.

Drying with Clips.

There are several ways of washing film. It may be placed in tray or wash bowl of cold water and left to soak for five minutes each in five changes of cold water, moving about occasionally to insure the water acting evenly upon it, or it may be given, say two changes as above and then left for an hour in a bowl with a very gentle stream of water running in and out.

DRYING N. C. FILM NEGATIVES.

When thoroughly washed, snap an Eastman Film Developing Clip on each end of the strip and hang it up to dry or pin it up. Be sure, however, that it swings clear of the wall so that there will be no possibility of either side of the film coming in contact with the latter. In drying, N. C. Film should be cut up into strips of *not more* than six exposures in length.

If the film has been cut up, pin by one corner to the edge of a shelf or hang the negatives on a stretched string by means of a bent pin, running the pin through the corner of film to the head, then hooking it over the string.

DEFECTIVE NEGATIVES.

By following closely the foregoing directions, the novice can make seventy-five per cent., or upwards of good negatives. Sometimes, however, the directions are not followed, and failures result.

To forewarn the camerist is to forearm him and we therefore describe the common causes of failure.

OVER-DEVELOPMENT.

Over-development may be caused by a mistake in leaving film in the developer too long; by using solution too warm or by those who mix their own developer in getting the developing agent too strong.

In this case the negative is very strong and intense by transmitted light and requires a very long time to print. The remedy is to reduce by use of Eastman's Reducer or the following method:

REDUCER.

First soak negative 20 minutes in water, then immerse in:

Water, - - - - - - - - - -	6 ounces
Hyposulphite of Soda, - - - - -	½ ounce
Ferri-Cyanide Potassium (saturated solution)	20 drops

Rock tray gently back and forth until negative has been reduced to the desired density, then wash 10 minutes in running water or in four changes of water.

Negatives may be reduced locally by applying the above solution to the dense parts with a camel's hair brush, rinsing off the reducer with clear water occasionally to prevent its running onto the parts of the negative that do not require reducing.

UNDER-DEVELOPMENT.

An under-developed negative differs from an under-exposed one, in that it is apt to be thin and full of detail, instead of harsh and lacking in detail.

This defect would be caused by a mistake in removing film from the developer too soon, by using solution too cold or by an error in compounding chemicals. It is obvious that neither of these defects will occur in Tank Development if instructions are properly followed.

INTENSIFICATION BY RE-DEVELOPMENT.

There are a number of different processes for intensifying under-developed negatives, the most common being by means of Bichloride of Mercury, and Sodium Sulphite or Ammonia.

This method, though simple to use, has its disadvantages, as it builds up the highlights out of proportion to the weaker portions of the negative, and also, unless carefully handled is apt to produce iridescent stains, or granular markings that are impossible to remove.

While the method of intensification by re-development is only comparatively new, the now common use of Velox and Royal Re-developer for Sepia tones on Velox and Bromide prints will make this the most effective means of intensification.

Velox or Royal Re-developer may be used in exactly the same manner as for producing Sepia tones on developing paper.

Negatives intensified by re-development are built up even, without undue contrast and without the chance of staining.

The advantage of being able to use the chemicals for two different purposes (Sepia toning prints or intensifying negatives) is obvious, the result in either case being all that could be desired.

PART V.

PRINTING ON VELOX PAPER.

Eastman N. C. Film negatives yield beautiful, soft black and white effects when printed on Velvet Velox.

MANIPULATION.

Velox prints may be successfully made, using daylight for exposure. Select a north window, if possible, as the light from this direction will be more uniform. *Owing to its sensitiveness the paper should be handled in subdued light, otherwise it will be liable to fog.* Proper precautions should be taken to pull down the window shades and darken the room sufficiently during manipulation. If the light is too strong for printing it should be subdued or diffused by the use of several thicknesses of white tissue paper. Owing to the varying intensity of daylight uniform results are not as certain as when using artificial light. In the following instructions for manipulating Velox, it must be understood that artificial light, preferably gas with a Welsbach burner, will be the light used. A kerosene lamp, fitted with a round burner (known as Rochester burner), may be used, but owing to the decidedly yellow light this affords, a considerably longer exposure will be necessary than when using a Welsbach light.

The comparative exposure with various sources of light is as follows :

	Size of Negative	Distance from Light	Welsbach Burner	32 C. P. Elec. or 6 ft. Gas Burner	16 C. P. Elec. or 4 ft. Gas Burner	Average Oil Lamp
Special Velox	4 x 5 or Smaller	7 Inches	10 Sec.	20 Sec.	30 Sec.	40 Sec.
Regular Velox	4 x 5 or smaller	7 Inches	40 Sec.	80 Sec.	2 Min.	3 Min.

Having provided a suitable light and a convenient place to work, arrange three trays before you on your work table in this order:

Nepera Solution	Clean Water	X	Kodak Acid Fixing Bath as directed on page 45
1	2	Towel	3

Proper temperature is important and for best results the developer should be 70 degrees Fahr. and the fixing bath and wash water 50 degrees Fahr. If the developer exceeds 70 degrees the prints are liable to fog and the emulsion soften. If too cold, chemical action is retarded, resulting in flat, weak prints.

PRINTING.

Velox may be safely manipulated ten feet from the ordinary gas flame.

Having everything in readiness, open the printing frame and lay the negative back down upon the glass—(the back is the shiny side). Place upon the negative a sheet of the Velox paper face down.

The paper curls slightly, the face or sensitive side being concave; an absolute test is to bite the corner of the sheet; the sensitive side will adhere to the teeth.

The paper not used must be kept covered in its envelope.

Place the printing frame the correct distance from the artificial light used, holding the frame away from the burner a distance equal to the diagonal of the negative. See exposure table, page 49.

We suggest, before making the first exposure, the cutting of a piece of Velox paper into strips about an inch wide and placing one of them over an important part of the negative make the exposure, using your best judgment as to the distance from the light and the time of printing. Develop it, and if not satisfactory try another strip, varying the time

as indicated by the first result. When the desired effect is secured, you can make any number of prints from the same negative, and if the time of exposure, distance from light as well as the time of developing are identical, all the prints should be equally good. By comparing your other negatives with the one you have tested, you will be able to make a fairly accurate estimate of exposure required by any negative.

After taking the exposed piece of paper from the printing frame, in a safe place previously selected, it is ready for development. The dry print should be immersed face up in the developer (Tray No. 1) and quickly and evenly covered with the solution. Regular Velox should be developed not to exceed twenty seconds ; Special Velox about twice as long. No exact time can be given as the strength of developer used would make a difference in the time.

As soon as the image has reached the desired depth remove from the developer to the second tray and rinse for a moment, turning the print several times, then place it in the acid fixing bath (Tray No. 3) keeping the print moving for a few seconds, the same as was done when rinsing, so as to give even and thorough fixing, preventing stains and other troubles. Leave the print in this solution until thoroughly fixed; this will take about fifteen minutes. When fixed remove from the fixing bath and wash thoroughly for about an hour in running water, then dry. After drying, prints may be trimmed and mounted.

Do not use a fixing bath that has been used for fixing film.

You should be systematic in working, remembering that cleanliness is essential in photography. Care must be taken to prevent the Hypo fixing bath in any way getting into the tray containing the developer. Have a clean towel when beginning the work and wipe your hands each time after you have handled prints in fixing bath.

Details.

CLEAN DISHES : CLEAN HANDS : The faintest trace of Hypo-Sulphite of Soda will spoil the prints if it gets

into contact with them before the proper time. Great care should therefore be used to have both hands and trays clean.

DEVELOPER once used should not be carried over and used the next day or subsequently.

Don't.

Don't use a tray for developing which has previously been used for hypo solution, pyro developer or final washing.

Don't use an old fixing solution, it is liable to cause trouble.

Difficulties: Their Cause and Remedy.

VEILED WHITES: Caused by forcing development, fogged paper.

REMEDY: Give more time, screen light. Also caused when image flashes up in developer by too much exposure, in which case give less time.

MUDDY SHADOWS: Caused by developer being used for too many prints. Remedy, use fresh developer.

CONTRASTY PRINTS: Caused by insufficient time or negative too harsh. Remedy, give more time; make softer negatives.

FLAT PRINTS: Caused by overtiming or negatives flat. Remedy, give less time in first instance, and if trouble is with negatives, give negatives less time; develop further.

STAINS: Caused by forcing development, or chemically dirty dishes or hands, insufficient fixing, foreign chemicals. Remedy, do not allow chemicals other than those given in formulas to come in contact with paper; use fresh fixing bath; keep prints in constant motion the entire 15 minutes they remain in fixing, and if due to forcing development give more time in printing.

ROUND, WHITE SPOTS: Caused by air bells which form on face of print when developer is first flowed on. Remedy, use more developer, break air bells with finger.

For further particulars, ask your dealer or write us for a copy of the "Velox Book."

PART VI.

MOUNTING.

The most satisfactory method for mounting prints of any size is by the use of Kodak Dry Mounting Tissue, as by the use of this tissue the print lies perfectly flat in absolute contact even on the thinnest mount and absolutely without curl.

The tissue comes in flat sheets, dry, not sticky, and easy to handle, and the tissue being water-proof protects the print from any impurities in the mount stock.

For multiple mounting and folders the tissue is ideal.

The process of mounting is as follows :

Lay the print on its face and tack to the back a piece of the tissue of the same size as the print by applying the point of a hot flatiron to small spots at opposite ends.

Turn the print face up and trim the print and tissue to the desired size. Place in proper position on mount and cover print with a piece of smooth paper and press the whole surface with a hot flatiron.

Press, don't rub.

The iron should be just hot enough to siss when touched with the wet finger. If the iron is too hot the tissue will stick to the mount and not to the print, if too cold the tissue will stick to the print and not to the mount.

Remedy : Lower or raise the temperature of the iron and apply again.

When mounting with paste, lay the wet print face down on a sheet of glass and squeegee off all the surplus water, then brush over the back with thin starch paste, lay the print on the mount, then cover the print with a clean piece of cotton cloth and rub into contact with a soft cloth.

EASTMAN KODAK COMPANY,
Rochester, N. Y.

PRICE LIST.

No. 3A Folding Pocket Kodak, with R. R. lens and F. P. K. Automatic Shutter, for pictures 3¼ x 5½ (not loaded),	$20.00
Do., fitted with Kodak Automatic Shutter and R. R. lens,	25.00
Black Sole Leather Carrying Case, with strap,	1.50
Combination Back for Film or Double Plate Holders,	3.50
Double Glass Plate Holders, 3¼ x 5½, each,	1.00
Kodak Portrait Attachment,	.50
N. C. Film Cartridge, 10 exposures, 3¼ x 5½,	.70
Do., 6 exposures,	.40
Do., Double-Two Cartridge, (4 exposures),	.30
Eastman's Extra Rapid Dry Plates, 3¼ x 5½, per doz.,	.65
Kodak Film Tank, 3½ inch,	5.00
Duplicating Outfit for same,	2.50
Kodak Tank Developer Powders, for 3½ inch Tank, per pkg., ½ doz.,	.20
Kodak Acid Fixing Powder, per 1 pound package,	.25
Do., ½ pound package,	.15
Do., ¼ pound package,	.10
Eastman's Developer Powders (for dark room development), per doz. pairs,	.50
Do., per ½ doz. pairs,	.25
Eastman's Hydrochinon Developer Powders (do not stain the fingers),	.50
Do., per ½ doz. pairs,	.25
Eastman's Pyro Developer Powders (for dark room development), per doz.,	.50
Do., per ½ doz. pairs,	.25

Eastman's Hydrochinon, Eikonogen, Pyro and Special Developer Powders, in sealed tubes, per box of 5 tubes, ... $ .25
Velox Paper, per dozen, 3¼ x 5½, ...15
Nepera Solution (for developing Velox), 4 ounce bottle, ...20
Solio Paper, per pkg. 2 doz., 3¼ x 5½, ...25
Combined Toning and Fixing Solution, for Solio, per 8 ounce bottle, ...50
Do., 4 ounce bottle, (in mailing case, including postage, $ .50), ...30
Eastman's Reducer, per box of 5 tubes, . . .25
Royal Re-Developer, per package of 6 tubes, . .75
Eastman's Sepia Paper, 2 doz. 3¼ x 5½, . . .20
Eastman's Flash Sheets, No. 1, per pkg. ½ doz., .25
Do., No. 2, per pkg. ½ doz., ...40
Do., No. 3, per pkg. ½ doz., ...60
Kodak Dry Mounting Tissue, 3¼ x 5½, 2 doz. sheets, .10
Eastman's Film Developing Clips, 3½ inch, per pair, (nickeled), ...25
Kodak Film Clips, (wooden), 5 inch, per pair, . .15
Eastman's Folding Head Tripod, maple, . . 3.50
Bulls-Eye Tripod, ... 1.50
Eastman's Kodak Dark Room Lamp No. 2, ⅝ inch wick, ... 1.00
Eastman's Indexed Negative Albums, to hold 100 3¼ x 5½ film negatives, ... 1.00
Kodak Trimming Boards No. 2, capacity 7 x 7 inches, ...60
Bevplane Mounts, 3¼ x 5½, per 100, ...90
Do., per 50, ...45
The Arena Album, 50 black or Sepia leaves, size 7 x 10, ... 1.50
"The Modern Way in Picture Making," the best book for the amateur ever written, cloth bound, 1.00

Developing, printing and mounting, on Velox, per roll of 10 exposures,	$ 1.50
Do., unmounted, per roll of 10,	1.10
Developing only, each,	.08
Printing and mounting only, each, on Velox,	.10
Do., Velox unmounted,	.09

On orders for developing and printing less than ten exposures, 25 cents extra will be charged. Prints are always furnished unmounted, on Velox, unless otherwise specified in order.

11 x 14 Bromide Enlargements, mounted on card,	1.25
14 x 17 Bromide Enlargements, mounted on card,	1.50

EASTMAN KODAK COMPANY,
Rochester, N. Y.

PRINTS DO NOT CURL

WHEN MOUNTED WITH

Kodak Dry Mounting Tissue

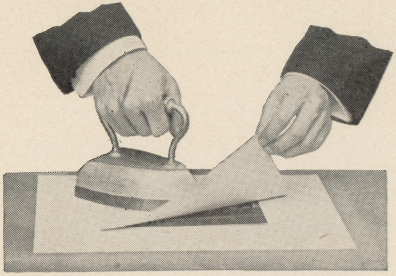

Just the Tissue and a Flatiron

Dry Mounting Tissue is incomparable for album work. The leaves lie flat with perfect adhesion.

EASTMAN KODAK CO.,
Rochester, N. Y.

All Dealers.

PIN TO A CARD AND TOUCH WITH A MATCH.

THAT'S ALL THERE IS TO USING EASTMAN'S FLASH SHEETS.

They burn more slowly than ordinary flash powders, giving a softer light and consequently a more natural expression to the eyes.

Clean, convenient, a minimum of smoke.

Price per package of ½ dozen sheets.

No. 1,	=	=	=	**$.25**
No. 2,	=	=	=	**.40**
No. 3,	=	=	=	**.60**

EASTMAN KODAK CO.

For sale by all dealers.

Rochester, N. Y.

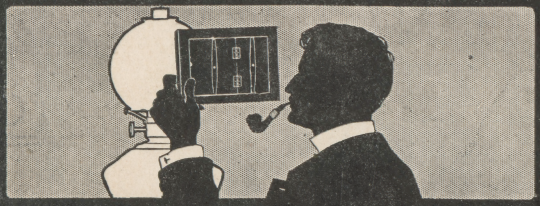

ROYAL VELOX

A new paper with all the Velox simplicity but coated on a mellow toned stock that adds breadth and softness to the picture.

When sepia toned, with Velox Re-Developer, Royal Velox has the delicacy and charm of an old etching.

At all Kodak Dealers

NEPERA DIVISION,

Eastman Kodak Co.,

Rochester, N. Y.

"If it isn't an Eastman,
It isn't a Kodak."